



Ibis LED 2000/ 3000/ 5000

Technical specification

Linear down light for LED tubes. Reflector with flood beam spread. Housing of Powder painted aluminium.

Model and colors Available in grey.

Area of use LED light for indoor applications, suitable for general lighting.

Technical data


Mains (input) voltage	220-240 V
Driver output	Constant voltage 28V, Max 60W
Total weight	2 kg
Form of protection	IP 20, class I
Color temperature	3 000/ 4 000 K
Light source	LED
Operating position	Vertical
Lamp holder	NLAB Standard
Control gear	Electronic
Start time	Instant
Driver	Included
Reflector	High quality anodized reflector
Optics	
Beam spreads	Flood
Design lifetime	L80 B10 50 000h

Flood 2000			Flood 3000			Flood 5000		
26W	100°/42°		33W	100°/47°		50W	100°/41°	
m	∅	lux	m	∅	lux	m	∅	lux
1.0	2.38	2077	1.0	2.40	2467	1.0	2.38	4130
2.0	4.77	519	2.0	4.80	617	2.0	4.77	1033
3.0	7.15	231	3.0	7.20	274	3.0	7.15	459

Art no	Description	Color
223-500	Ibis LED 2000, 830, 220-240V, for Track mounting	Grey
223-501	Ibis LED 3000, 830, 220-240V, for Track mounting	Grey
223-502	Ibis LED 5000, 830 220-240V, for Track mounting	Grey
208-36	Horizontal wire and ceiling suspension	Grey

Note

Product also available in higher power levels. Final shipping destination may require minor modifications of components as well as article numbers, be sure to state the country in which the fixtures will be used.

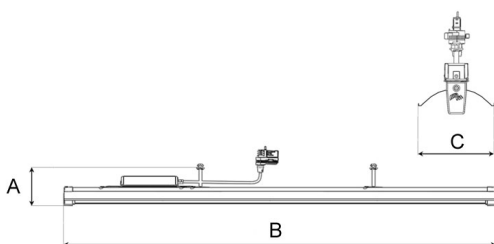

A 131 B 1492 C 151 (mm)