




Spot			Medium			Flood			Wide Flood		
39W	17°		39W	32°		39W	41°		39W	57°	
m	∅	lux	m	∅	lux	m	∅	lux	m	∅	lux
1.0	0.30	24289	1.0	0.58	8772	1.0	0.76	6155	1.0	1.09	4452
2.0	0.60	6072	2.0	1.16	2193	2.0	1.51	1539	2.0	2.19	1113
3.0	0.91	2699	3.0	1.74	975	3.0	2.27	684	3.0	3.28	495

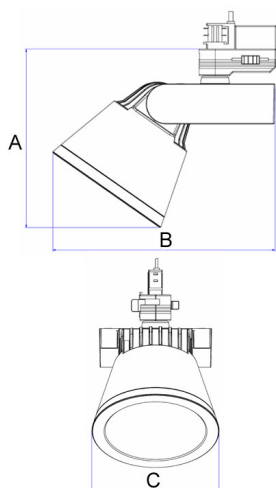

A 178 B 222 C 132 (mm)

Ultra R COB 4000 G2

Technical specification

LED Track light with incorporated electronic driver and Chip on board. High color rendering index +90. High quality reflector with four different beam spreads.

Lamp housing of die-cast aluminium for optimal cooling, long lifetime and low weight.

Model and colors Available in white, black and grey.

Area of use Track light for indoor applications.

Technical data

Mains (input) voltage	220-240 V
Total weight	1,2 kg
Form of protection	IP 20, class I
Color temperature	3 000 K
Light source	LED
Operating position	360°/90°
Start time	Instant
Driver	Electronic, built in
Optics	Optic reflector
Beam spreads	Spot, Medium, Flood, Wide flood

Art no (EU)

265-580-10
265-580-20
265-580-30
265-581-10
265-581-20
265-581-30
265-582-10
265-582-20
265-582-30
265-583-10
265-583-20
265-583-30

Description

Spot
Spot
Spot
Medium
Medium
Medium
Flood
Flood
Flood
Wide flood
Wide flood
Wide flood

Color

White
Black
Grey
White
Black
Grey
White
Black
Grey
White
Black
Grey

Type	Lumen output [lm]	Power [W]	EEI ⁹
830	4200	39	A+
930	3600	39	A+
840	4400	39	A++
940	3800	39	A+

Note

Product available with meat or bread COB on request.

Final shipping destination may require minor modifications of components as well as article numbers, be sure to state the country in which the fixtures will be used.